


twenty[®] series plinth & spike installation guide

IMPORTANT: Steel washers are now included and should be used between the M8 spike nut and the plinth

Resonance damping plinths and spikes enhance the performance and stability of the floorstanding models in the range. The plinths attach to the base of each speaker using M8 countersunk bolts. The **twenty**[®] series spikes are reversible, with spike or ball tips for use on either carpeted or more sensitive hard flooring.

- Carefully invert the loudspeaker so that its base is uppermost. Take care not to damage the top of the loudspeaker when it is upside-down, the use of a soft cloth or square of carpet is suggested.
- Position the plinth on the bottom of the loudspeaker so that its large curved edge is to the rear (same face as 4mm terminals/sockets).
- Ensure that the corresponding inserts in the base of the cabinet are aligned with the rebated holes in the plinth.
- Locate the large countersunk M8 bolts and tighten them **gently** using the allen key supplied until the heads of the bolts are flush with the plinth's surface. Once the bolts are flush carefully tighten each bolt by **half a turn**
N.B. Do not over tighten. Over tightening will reduce the effect of the resonance absorbing material
- Fully thread each spike with one of the supplied lock nuts. Then **add a washer** (See diagram on right) The spikes can then be attached to the plinth; they should point upwards whilst the cabinet is inverted.
- Re-invert the loudspeaker so that the spikes and plinth are at the bottom.
- Once in position, level the loudspeaker by adjusting each spike in turn. The final step is to **gently** tighten each spike's lock nut with the spanner provided; this will ensure that the spike and loudspeaker are rigid. Please note the word **gently**. The quality of audio will not improve if you apply a huge force.

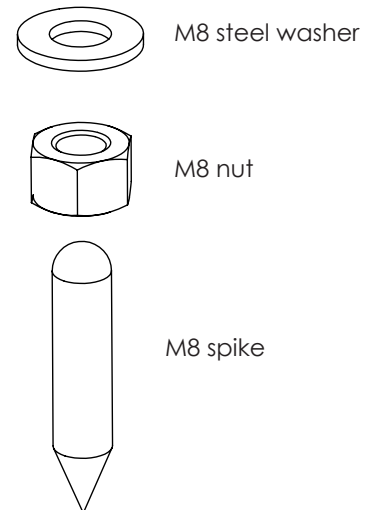

CAUTION: The spikes are sharp and should be treated with great care and may damage hard flooring if in direct contact. You have the option of using the ball tips for use on more sensitive flooring, but please note even a ball tip can damage very delicate flooring.

NB: Spikes and plinth fixings for a pair of loudspeakers are contained within one carton

IMPORTANT

STEADY THE LOUDSPEAKER CABINET WHILE REMOVING THE CARTON

It is easy to register your speakers online and validate your warranty by visiting www.pmc-speakers.com and clicking on **register a product**.



PMC[®]
www.pmc-speakers.com